


Prestazioni / Performances

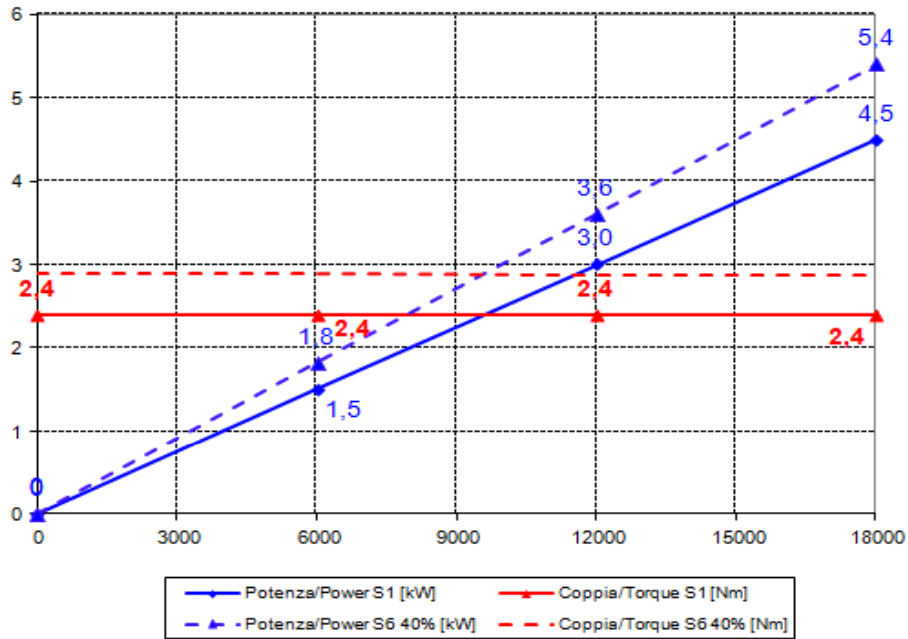

Specifiche tecniche/ Technical Specifications

Tipologia elettromandrino / Electrospindle type	Asincrono-2 poli / Asynchronous-2 poles
Attacco utensile / Tool interface	ER32 DX
Velocità rotazione max / Max speed	18000 rpm
Raffreddamento / cooling	elettroventola 24V DC / air by electric fan 24V DC
Potenza max. (S1-S6) / Max. Power.(S1-S6)	4,5 kW @18000 Rpm / 5,4 kW @18000 Rpm
Coppia max. (S1-S6) / Max. Torque (S1-S6)	2,4 Nm / 2,9 Nm
Corrente (S1-S6) / Current (S1-S6)	9,5 A / 15 A
Tensione / Voltage	380 V
Rotazione / Rotation	CW
Azionamento / Supply	Con inverter / By inverter
Cuscinetti Anteriori / Frontal ball bearings	alta precisione / high precision
Peso / Weight	14 kg