





ss 258 Marecchia, 34 47826 Villa Verucchio, Rimini - Italia tel. +39.0541.674940 - fax +39.0541.674962 www.hiteco.net











DIGITAL

SOLUTIONS
Easy interface with hmi pc or fieldbus of the machine where it is installed on



MONITORING

Displays the electrospindle machining conditions continuously and in real time



SAFETY

The sensor immediately communicates if the operating conditions are too demanding or dangerous



PRECISION


PREVENTIVE

MAINTENANCE Machine downtimes can be prevented by

monitoring the spindle's


operation over the time

The sensor's exclusive technology detects the vibrations produced by the electrospindle and ignores those caused by the rest of the machine

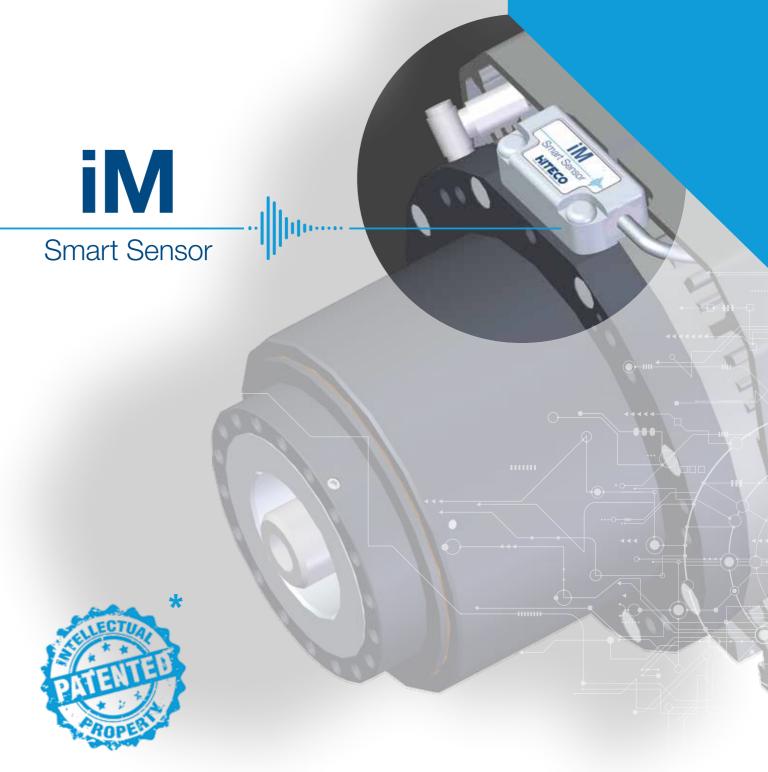



Maximize the productivity of your machine and increase the **life** of your electrospindle with iM Smart Sensor

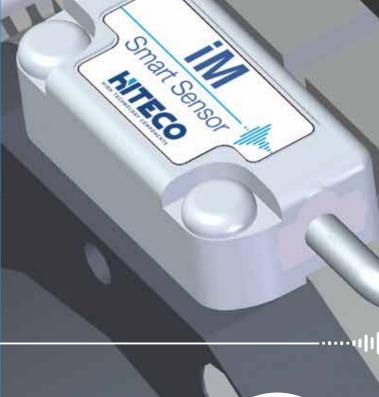

The **iM Smart Sensor** is an intelligent sensor that constantly monitors the machining conditions of the spindle it is installed on. It can support the whole pro the spindle works on: vibration and temperature. This malfunctions and consequently reduce unexpected








Maximising machine productivity **Programming** targeted **Increase the** electrospindle's **Increase** the machine's safety levels

AN INTELLIGENT SENSOR FOR A MACHINE THAT WORKS **IN COMPLETE SAFETY**

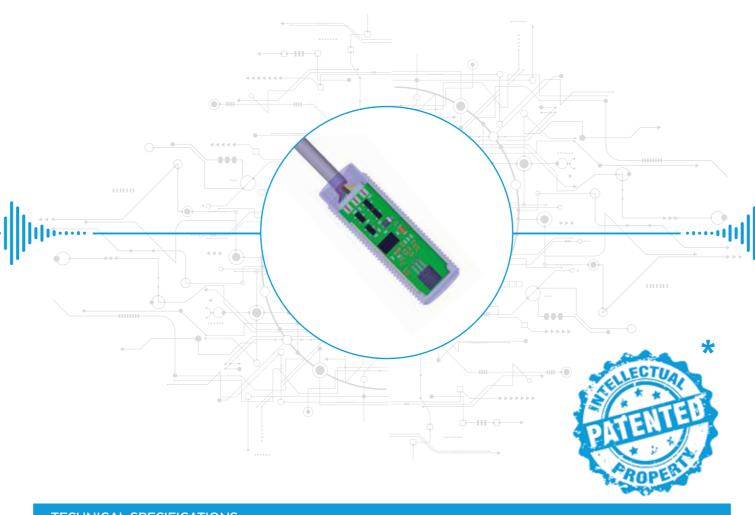

FECHNICAL SPECIFICATIONS	
Accelerometer	triaxial with three right-angle axes X, Y and Z
Type of sensor	MEMS
Field of measurement	±16 g (±156 m/sec^2)
Bandwidth	1000 Hz
Resolution	0,125 g/sample
Operating temperature	from 5 to 85°C
Impact resistance	3000 g (29400 m/sec^2)
Connectivity	Modbus on RS485

^{*} ITALIAN PATENT MO2006A000421

An **intelligent sensor** for a machine that works in complete safety

- On-board triaxial accelerometer: the sensor measures the vibrations in all directions
- Filtering of measured vibrations: the sensor detects only the electrospindle vibrations, filtering out those produced by the rest of the machine. Prevention of false
- Hardware alarm: the sensor features an on/off electrical contact to communicate whether the vibration level measured is dangerous
- Communication via modbus on RS485: fast and universal, it ensures direct and easy communication with other fieldbus (e.g. ethercat, io-link)
- · Available for Powertech electrospindles (3-axis machines) and for Robotech electrospindles (5-axis machines)

iM Smart Sensor HMI interface. Your spindle's life in just a few clicks

The simple and intuitive **iM Smart Sensor HMI interface** lets you monitor in real time the machining conditions of the electrospindle on a graph and check whether the operation is optimal or not.

- Spindle actual values: it is used to monitor, through an intuitive graph and coloured histograms, the vibration level, the rotation speed and the temperature of the electrospindle bearings
- Spindle state: state indicator that checks whether the machining conditions of the electrospindle are optimal or not





• Real time values: graph that displays the vibration level, acceleration and bearings' temperature values over time

SPINDLE VIBRATION SENSOR